


GRADE 1 TRIM TEMPLATE

ESCUTCHEON LEVER TYPE

FOR BE, CE & DE MODELS USE

LHR AND RHR HANDING

LAWRENCE®
HARDWARE INC.
 TEMPLATE FOR
89L ESCUTCHEON LEVER TRIM DEVICE FOR
BE (BLANK ESCUTCHEON), CE (CYLINDER ESCUTCHEON),
DE (DUMMY ESCUTCHEON) USE.

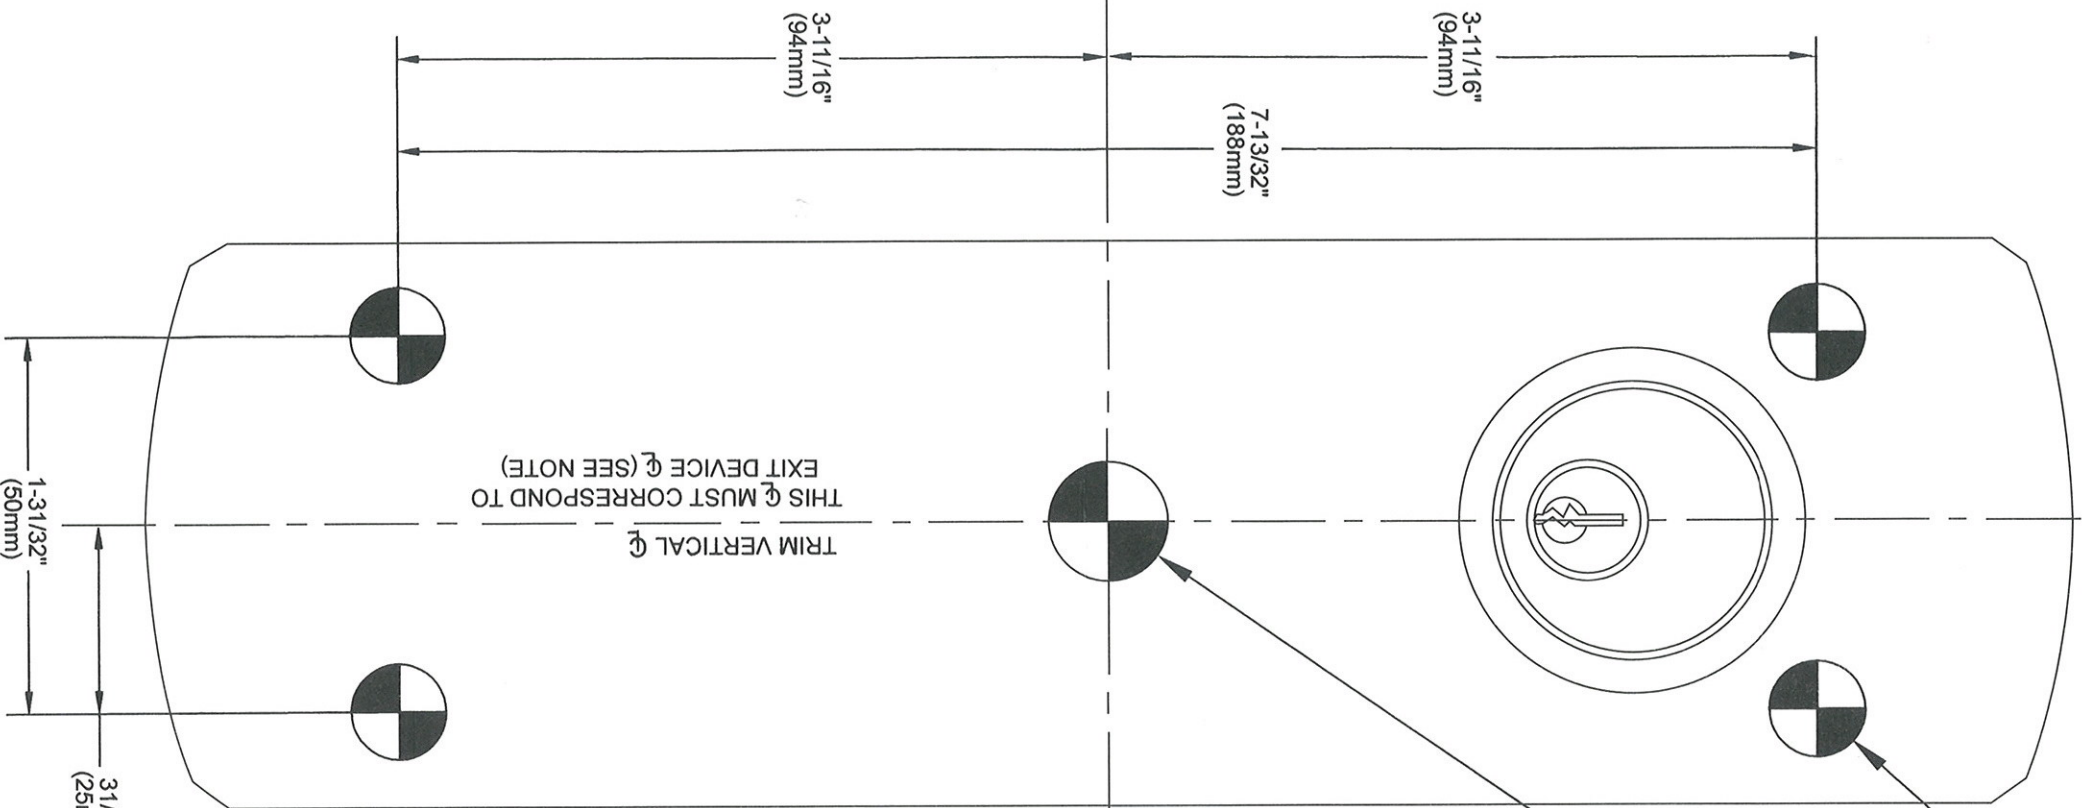

TRIM MOUNTING HOLES
 DRILL 1/2" (13mm) DIA., 4 PLACES

ESCUTCHEON LEVER TRIM DEVICE FOR
88 / 89L01 – A - CE (CYLINDER ESCUTCHEON),
88 / 89L01 – B - BE (BLANK ESCUTCHEON),
88 / 89L01 – D - DE (DUMMY ESCUTCHEON).

TRIM TELESCOPIC ACTUATING SHAFT HOLE
 DRILL 5/8" (15.9mm) DIA. THRU HOLE FOR CE & BE TRIM,
 (NOT REQUIRED FOR DUMMY TRIM)

TRIM HORIZONTAL Q
 THIS Q MUST CORRESPOND TO
 EXIT DEVICE Q (SEE NOTE)

NOTE:
 SEE "DOOR APPLICATIONS" ON PAGE 1 OF
 THE TRIM INSTALLATION INSTRUCTIONS
 FOR ALIGNMENT DETAILS.

TRIM VERTICAL Q
 THIS Q MUST CORRESPOND TO
 EXIT DEVICE Q (SEE NOTE)

OUTSIDE FACE OF DOOR

GRADE 1 TRIM TEMPLATE


ESCUTCHEON LEVER TYPE

FOR NIGHT LATCH MODEL USE

LHR AND RHR HANDING

LAWRENCE®
HARDWARE INC.

TEMPLATE FOR
88 / 89L01 - C - ESCUTCHEON LEVER TRIM
DEVICE FOR NL(NIGHT LATCH) USE.

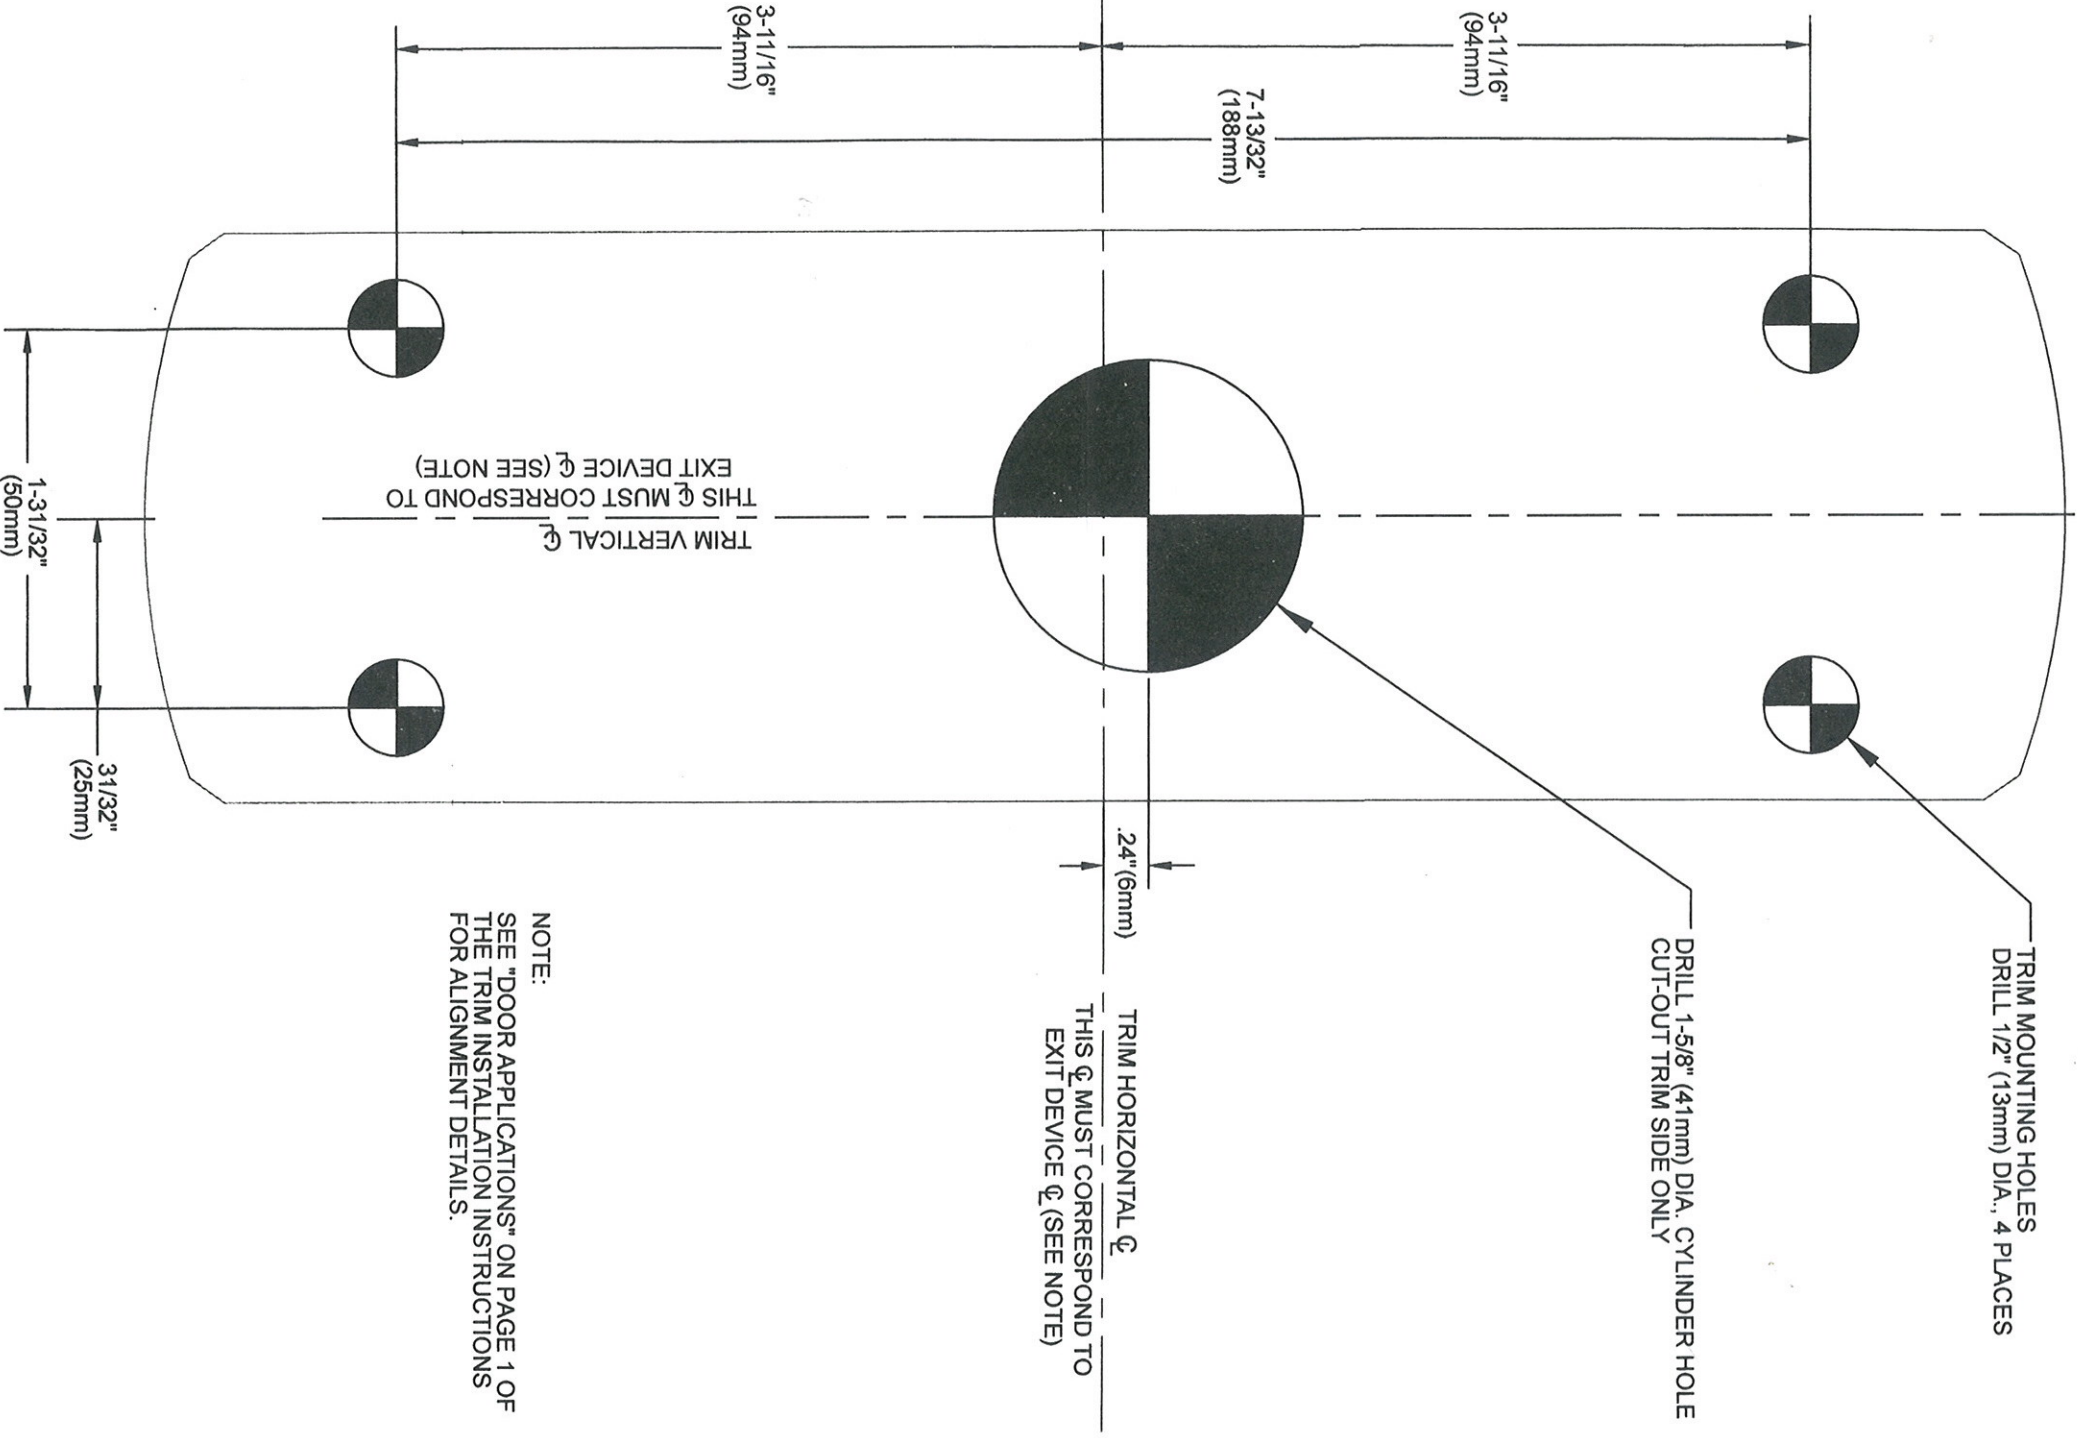

NOTE:
 SEE "DOOR APPLICATIONS" ON PAGE 1 OF
 THE TRIM INSTALLATION INSTRUCTIONS
 FOR ALIGNMENT DETAILS.

OUTSIDE FACE OF DOOR